


*Innovative Power Engineering at its best!*

# HIGH VOLTAGE VACUUM CIRCUIT BREAKER

FOR 72/126 KV, 1-2-3 POLE GANG OPERATION

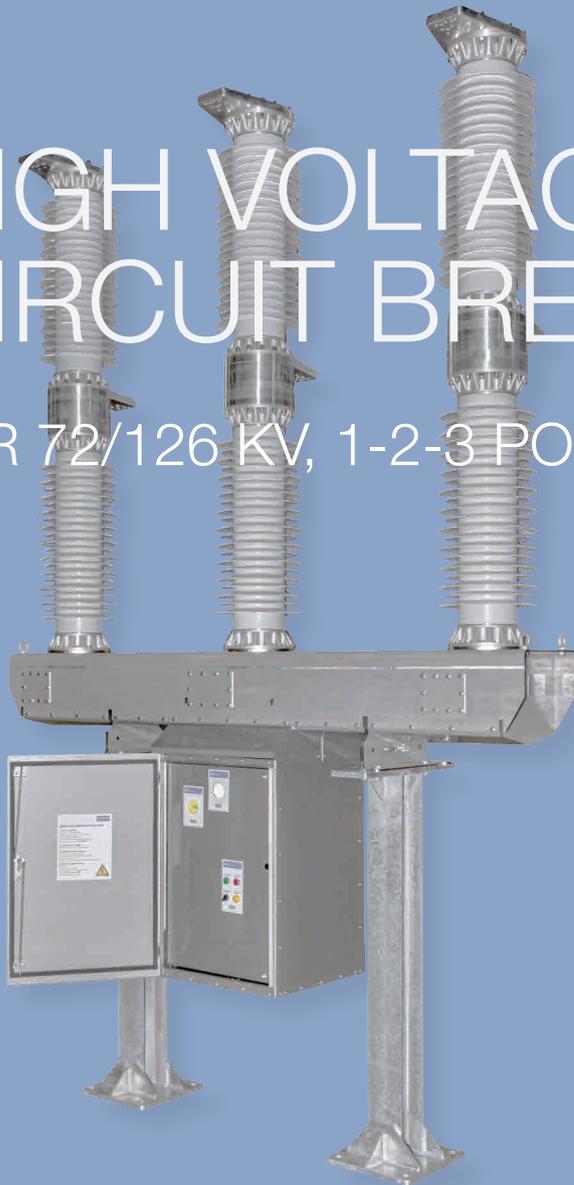

OVX720/1100 HIGH VOLTAGE, SOLID INSULATED  
VACUUM CIRCUIT BREAKER SERIES FOR  
DIFFERENT APPLICATIONS:

- Railway feeder stations;
- Electrical transmission systems;



# ABOUT US

Hughes Power System is a Swedish manufacturer of environmentally friendly equipment for electrification and automation of mass transport and electrical distribution systems. Very high quality standards together with innovative approach result in an advanced range of products, aiming to improve network quality by minimizing the number and duration of faults.

Our product portfolio includes:

- Solid insulated high and medium voltage vacuum circuit breakers
- Reclosers
- Disconnectors
- Motor drives
- Voltage transformers
- D/C power supplies


With its more than 30 years expertise in research, development, manufacturing, marketing and sales the company operates in many countries though cooperation with local partners. As we move towards our goal of being a world class advanced technological company in electrical utility products, we guarantee our commitment to the well known Swedish standards of reliability, safety and quality.

The majority of Hughes Power System's products are designed and built in Sweden.



## GENERAL DESCRIPTION

### OVX720

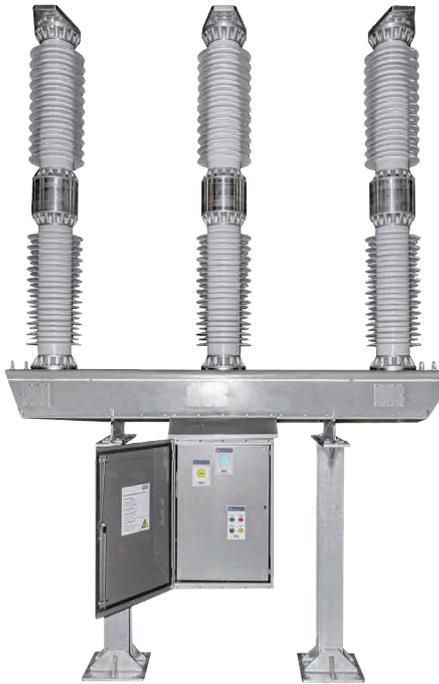

OVX723 - three poles version

### OVX720 KEY FEATURES:

- Solid insulated;
- 72.5 kV 3-phase;
- 42 kV single or double pole;
- 2500 A line current,
- 31.5 kA short circuit capacity;
- 325 kV BIL;
- 140 kV PF@ 50 Hz;
- Steel spring mechanical actuator;
- Solutions for 1-phase, 2-phase, 3-phase systems;
- Vacuum interrupter enclosed in a solid insulation;
- Anti-vandalism poles fitted with polymeric insulators as standard;

### WHAT IS AN OVX720 MODULARIZED VACUUM CIRCUIT BREAKER

Hughes OVX720 high voltage, solid insulated vacuum circuit breaker for 72kV is designed and manufactured in Sweden for railway feeder station and electrical transmission system applications.

### OVX720 SERIES MODEL RANGE

- OVX721 one pole vacuum circuit breaker for railway feeder stations;
- OVX722 two poles vacuum circuit breaker for railway feeder stations;
- OVX723 three pole vacuum circuit breaker for electrical transmission systems;



OVX721 - one pole version

### OVX720 ADVANTAGES:

- **Low maintenance.** Hughes vacuum circuit breakers are built to remain in operation for more than 30 years without major maintenance due to the highest quality materials used in its construction;
- **Solid insulated bushings** (1) that exclude risk for SF6 or mix gas leakage and oil leakage;
- **High current vacuum interrupters** (2) that will not produce any harmful switching products and are very easy to replace in comparison to gas insulated interrupters;
- The OVX720 uses **high-level insulated** bushings (3) with polymeric surface that gives superior BIL rating;
- The vacuum interrupter has **innovative design** allowing the unit to be modularized between 1, 2 or 3 poles for different applications. Normally 1 and 2 poles versions are used for railway electrification and 3 poles version is used for electrical transmission systems including renewable energy sectors;
- **Low life cycle cost** is guaranteed due to the combination of extremely high mechanical endurance and outstanding electrical parameters;
- The circuit breaker is **completely prewired** which makes it an easily remote-controlled solution;
- Both connection terminals can be supplied with **hole patterns** (4) in accordance with ANSI or IEC standards.




# MODULARIZED VACUUM CIRCUIT BREAKER

## GENERAL DESCRIPTION

### OVX720 COMPONENTS:



- Top solid insulated bushing (1) has upper connection terminal with low internal resistance;
- Thick metal connection terminal (2) that functions also as a heat sink for the vacuum interrupter bottle, that is installed inside the top bushing;
- The lower bushing (3) with the internal operating push-pull rod installed inside;
- The lower connection terminal (4) is a joint point for both bushings;
- The foot of the circuit breaker (5) contains the mandatory rating plate (6) with the electrical data in accordance with ANSI and IEC standards;
- The switch interconnection interface (7) is the connection point for the drive shaft between a switch module and an operating mechanism;
- The IP67 electrical contact (8) is the prewired SCADA interface that provides information about the switch position. It also connects to multiple CAM switches and the heating element;

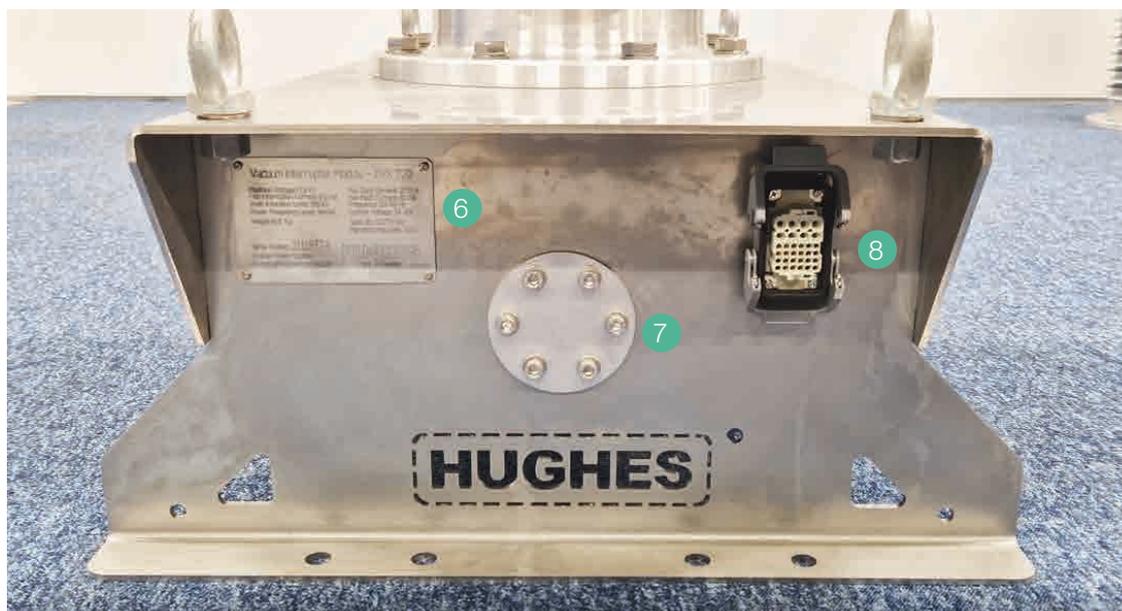

OVX720 foot

# DRAWINGS

OVX720

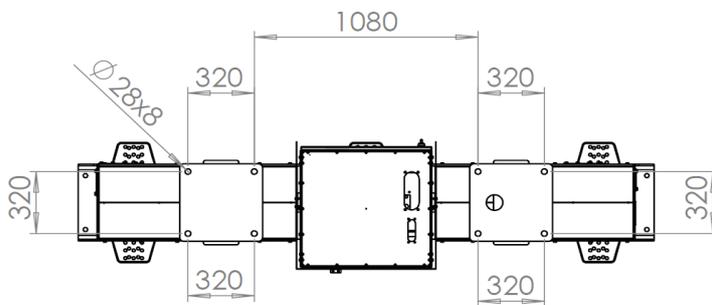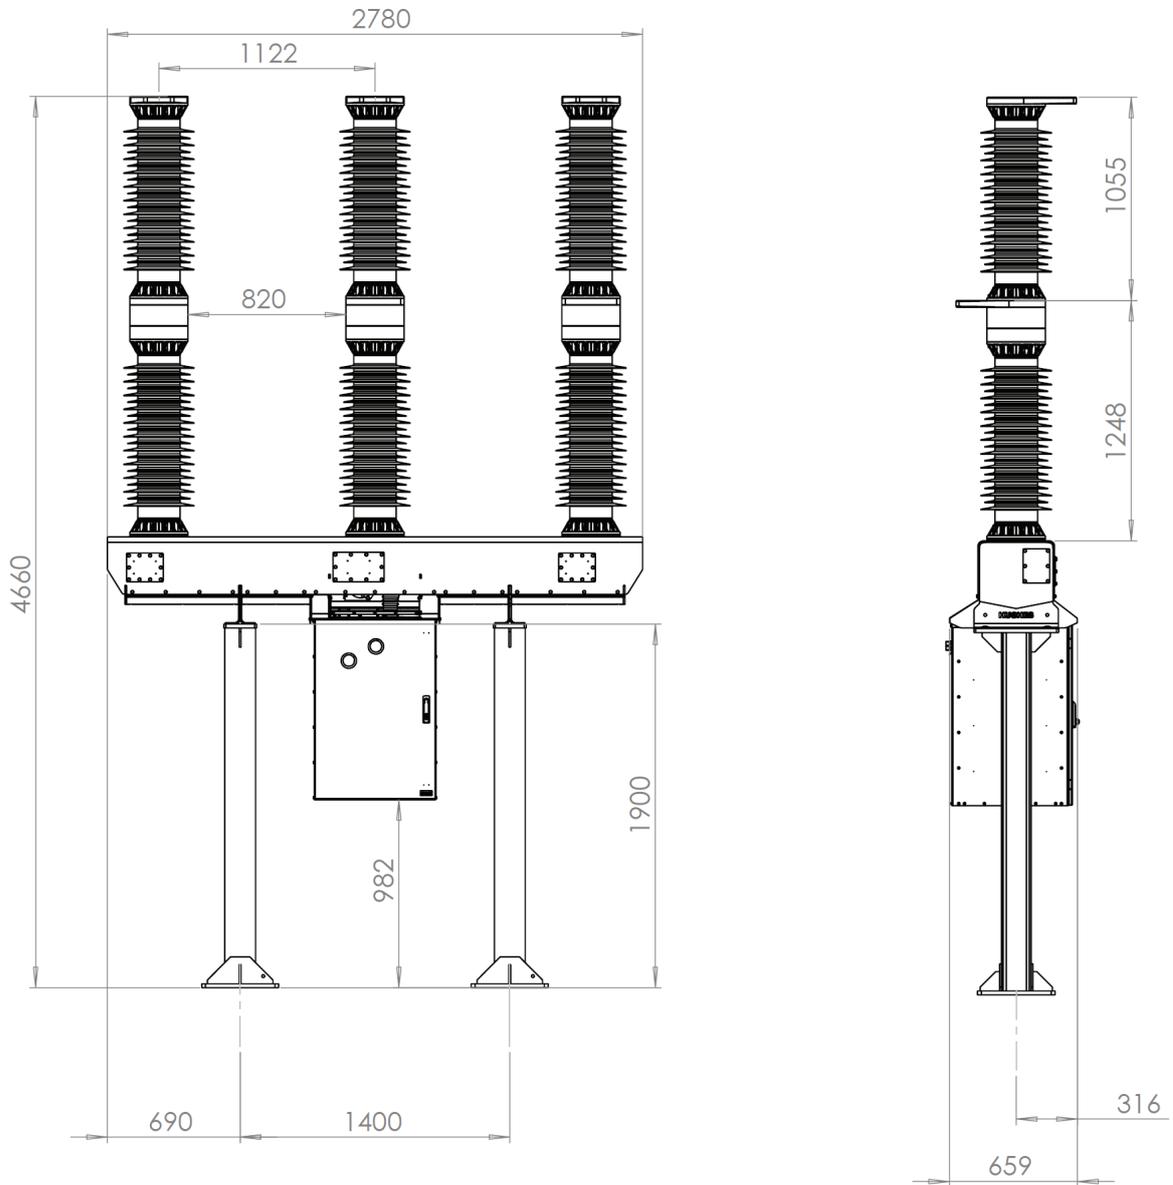

BOTTOM VIEW

## INSTALLATIONS

OVX720



En example of a 72kV vacuum circuit breaker installation, copnnecting a renewable energy plant with a transmission network.

# TECHNICAL DATA

## OVX720

TECHNICAL PARAMETER	OVX 721	OVX 722	OVX 723
Type	circuit breaker	circuit breaker	circuit breaker
Rated frequency, Hz	50/60	50/60	50/60
Operating voltage (phase to ground), kV	42	42	
Operation voltage (phase to phase), kV			72
Rated power frequency withstand voltage (50 Hz/1 min), kV	140	140	140
Lightning impulse withstand voltage (1.2/50 $\mu$ s), kV	325	325	325
Rated current, A	2500	2500	2500
Rated short-circuit breaking current, kA	31.5	31.5	31.5
Rated short-circuit making current, kA	80	80	80
Short circuit withstand current, kA/s	31.5	31.5	31.5
Operation mechanism	steel springs	steel springs	steel springs
Number of poles	1	2	3
Opening time, ms	$\leq 17$	$\leq 22$	$\leq 22$
Closing time, ms	$\leq 60$	$\leq 60$	$\leq 65$
Insulators	Polymeric	Polymeric	Polymeric
Operating class (IEC 62271-100)	E2	E2	E2
Dimensions (H x L x W), mm	1989 x 834 x 634 per module		
Operation voltage - Heaters lamp etc	110, 220 VDC/VAC		
Drive voltage - Trip/close coils - drive motor	48, 60, 72, 110, 220 VDC, 220 VAC		



Routine testing in Hughes high voltage lab

## GENERAL DESCRIPTION

### OVX1100



### OVX1100 KEY FEATURES:

- Solid insulated;
- 126 kV 1/2/3-phase;
- 3150 A, 31.5 kA;
- 550 kV BIL;
- 265kV PF@ 50 Hz over open contact;
- Steel spring mechanical actuator;
- Solution for 1/2/3-phase systems;
- Vacuum interrupter enclosed in a solid insulation;
- Anti-vandalism poles fitted with polymeric insulators as standard;

### WHAT IS AN OVX1100 HIGH VOLTAGE VACUUM CIRCUIT BREAKER

Hughes OVX1100 high voltage, solid insulated vacuum circuit breaker for 126kV is designed and manufactured in Sweden for different applications.

### OVX1100 SERIES MODEL RANGE:

- **OVX1101** - one pole vacuum circuit breaker for electrical distribution systems;
- **OVX1102** - two poles vacuum circuit breaker for railway feeder stations;
- **OVX1103** - three poles vacuum circuit breaker for electrical transmission systems.

The product is built to remain in operation for more than 30 years without major maintenance due to the highest quality materials used in its construction.



Lower connection terminal with multiple cable shoe standard pattern

## OVX1100 ADVANTAGES:


- **Low maintenance.** Hughes vacuum circuit breakers are built to remain in operation for more than 30 years without major maintenance due to the highest quality materials used in its construction;
- **Solid insulated bushings** that exclude risk for SF6 or mix gas leakage and oil leakage;
- **High current vacuum interrupters** that will not produce any harmful switching products and are very easy to replace in comparison to gas insulated interrupters;
- The OVX1100 uses **high-level insulated** bushings with polymeric surface that gives superior BIL rating;
- The vacuum interrupter has **innovative design** allowing the unit to be modularized between 1, 2 or 3 poles for different applications. Normally 2 poles versions are used for railway electrification and 3 poles version is used for electrical transmission systems including renewable energy sectors;
- **Low life cycle cost** is guaranteed due to the combination of extremely high mechanical endurance and outstanding electrical parameters;
- The circuit breaker is **completely prewired** which makes it an easily remote-controlled solution;
- Both connection terminals can be supplied with **hole patterns** in accordance with ANSI or IEC standards.



OVX1102

## OPERATIONAL MECHANISM FOR 720 AND 1100 SERIES

### PANELS AND INTERNAL PARTS

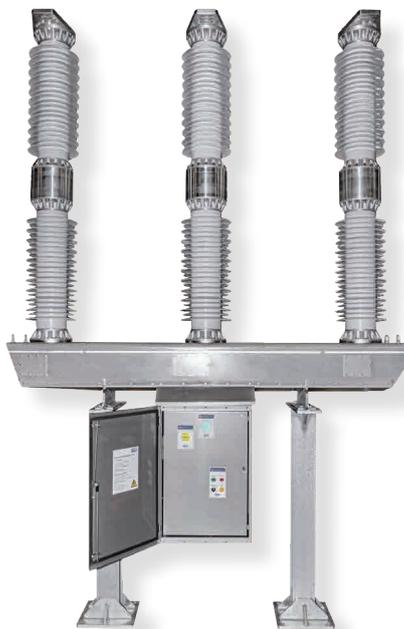

#### MAIN PANEL (1) BUTTONS AND INDICATORS:

- Mechanical spring charge indicator (2) shows the status of the stored energy mechanism;
- Switch main mechanical position indicator (3):
  - Red - switch is closed;
  - green - switch is tripped;
- Button (4) is “door open indicator” to the SCADA system, “lamp On” function;
- Switch electrical operation and indicator panel (5);

## ELECTRICAL OPERATION AND INDICATOR PANEL (5):


- Rotary switch (5) is the Remote – Off – Local switch;
- Green button – indicator (6) operates the switch to Trip and indicates the switch position;
- Red button – indicator (7) operates the switch to Close and indicates the switch position;
- Operation buttons can be supplied with a safety delay timer from 10 - 120 second's;
- Blue indicator lamp (8), indicates that the spring operation mechanism is fully charged and ready for a momentary Trip – Close - Trip operation;



Electrical operation and indicator panel

## INTERNAL PARTS OF THE CABINET:

- The circuit breaker is completely prewired which makes it an easily remote-controlled solution;
- The electrical contact (10) has the prewired SCADA interface that provides information about the switch position and connects to multiple CAM switches and the heating element (11);
- Inside the spring operation mechanism is the mechanical operation counter (12), control electronics with its automatic fuses;

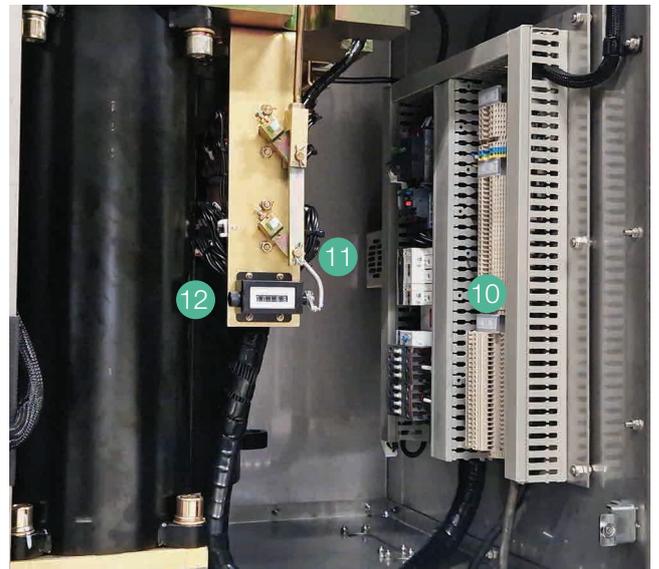


Internal parts of the cabinet

# MODULARIZED VACUUM CIRCUIT BREAKER

## COMPONENTS

### OVX1100 CONSISTS OF:

- Top solid insulated bushing (1) has upper connection terminal with low internal resistance;
- Thick metal connection terminal (2) that functions also as a heat sink for the vacuum interrupter bottle, that is installed inside the top bushing;
- The lower bushing (3) with the internal operating push-pull rod installed inside;
- The lower connection terminal (4) is a joint point for both bushings;
- The frame of the circuit breaker (5) contains the mandatory rating plate (6) with the electrical data in accordance with ANSI and IEC standards;

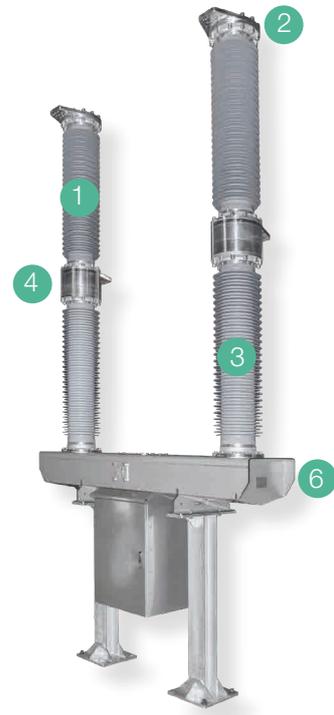

OVX1102 frame with rating plate

# TECHNICAL DATA




## OVX1100

TECHNICAL PARAMETER	OVX1101/1102/1103
Type	outdoor vacuum circuit breaker
Number of phases	1/2/3
Operation mechanism	steel springs
Insulators	polymeric
Rated frequency, Hz	50/60
Maximum altitude, m	2000
Rated voltage, kV	126
Insulating medium of contacts	vacuum
Rated current conformed to the transformer capacity, A	3150/4000
Rated power frequency withstand voltage (50 Hz/1 min) to earth/across open contact, kV	230/265
Lightning impulse withstand voltage (1.2/50 $\mu$ s), earth/across open contacts, kV	550/630
Rated breaking current, kA	31.5/40
Rated making current, kA	85/100
Make-time, ms	$\leq$ 50
Break-time, ms	$\leq$ 30
Longitudinal horizontal static stress, N	$\geq$ 1000
Horizontal static stress of cross section, N	$\geq$ 700
Vertical static stress, N	$\geq$ 700
Creep distance, mm	3970
Working sequence	C-0.3-OC-3min-OC
Coil operating voltage, V DC*	48/60/72/110/220
Motor operation voltage, V DC*	48/60/72/110/220
Rated power of motor, W	600
Number of closing coils	1 x
Power consumption of close coil, W	400
Number of trip coils	2 x
Power consumption of trip coils, W	400
Number of normally open blocking contacts	12 x
Number of normally closed blocking contacts	12 x
Number of switching operations	10,000
Mechanical buttons for closing/opening located in the operating mechanism	Yes
Remote/local control switch(electrical)	Yes
Close open buttons with LED indicators in cabinet (electrical)	Yes
Size (HxLxW), mm	5360 x 2480-4260 x 690
Operation voltage - Heaters - lamp etc	110, 220 VDC/VAC

# MODULARIZED VACUUM CIRCUIT BREAKER

## DRAWINGS


OVX1102

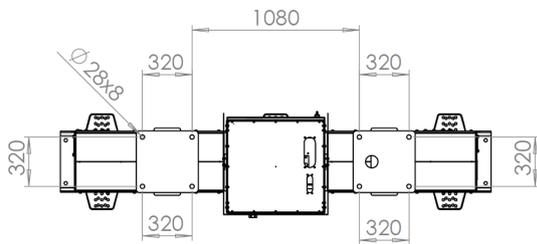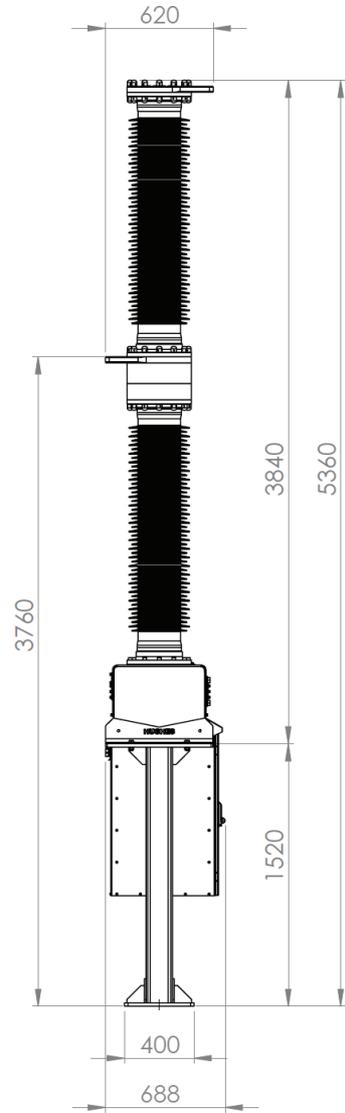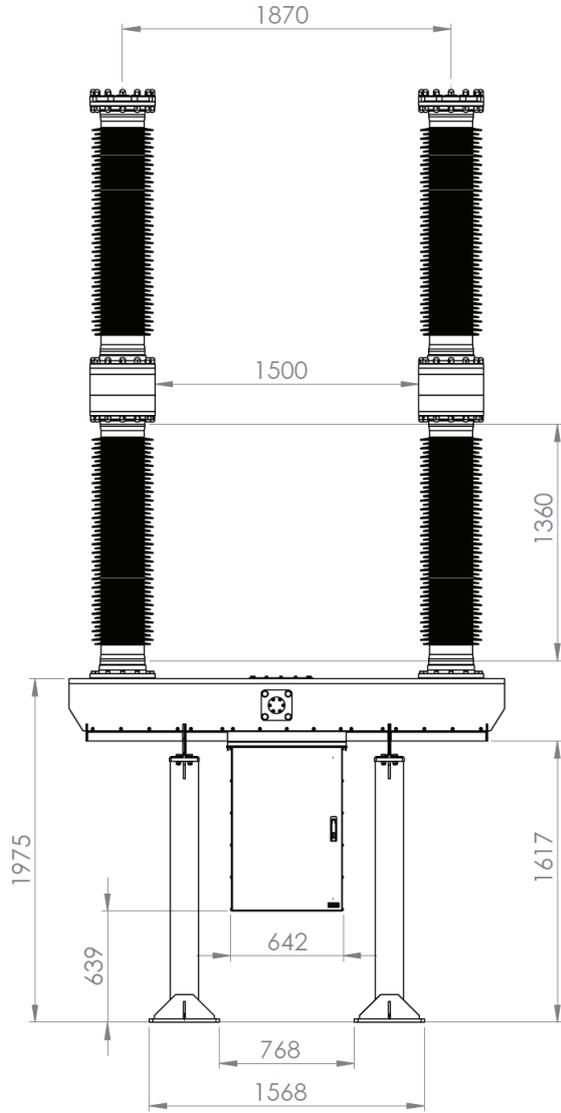

BOTTOM VIEW

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS		DEBUR AND BREAK SHARP EDGES	Date: 04/01/2023	<b>HUGHES</b>
SURFACE FINISH:			Revision:	
TOLERANCES:			Title:	110 kV railway feeder station CB
LINEAR:			Part No:	
ANGULAR:			DWG NO:	OVX_1102_0000
A3	FINISH:			
SCALE: 1:25	MATERIAL:			
DO NOT SCALE DRAWING	WEIGHT:		SHEET 1 OF 1	

OVX1103

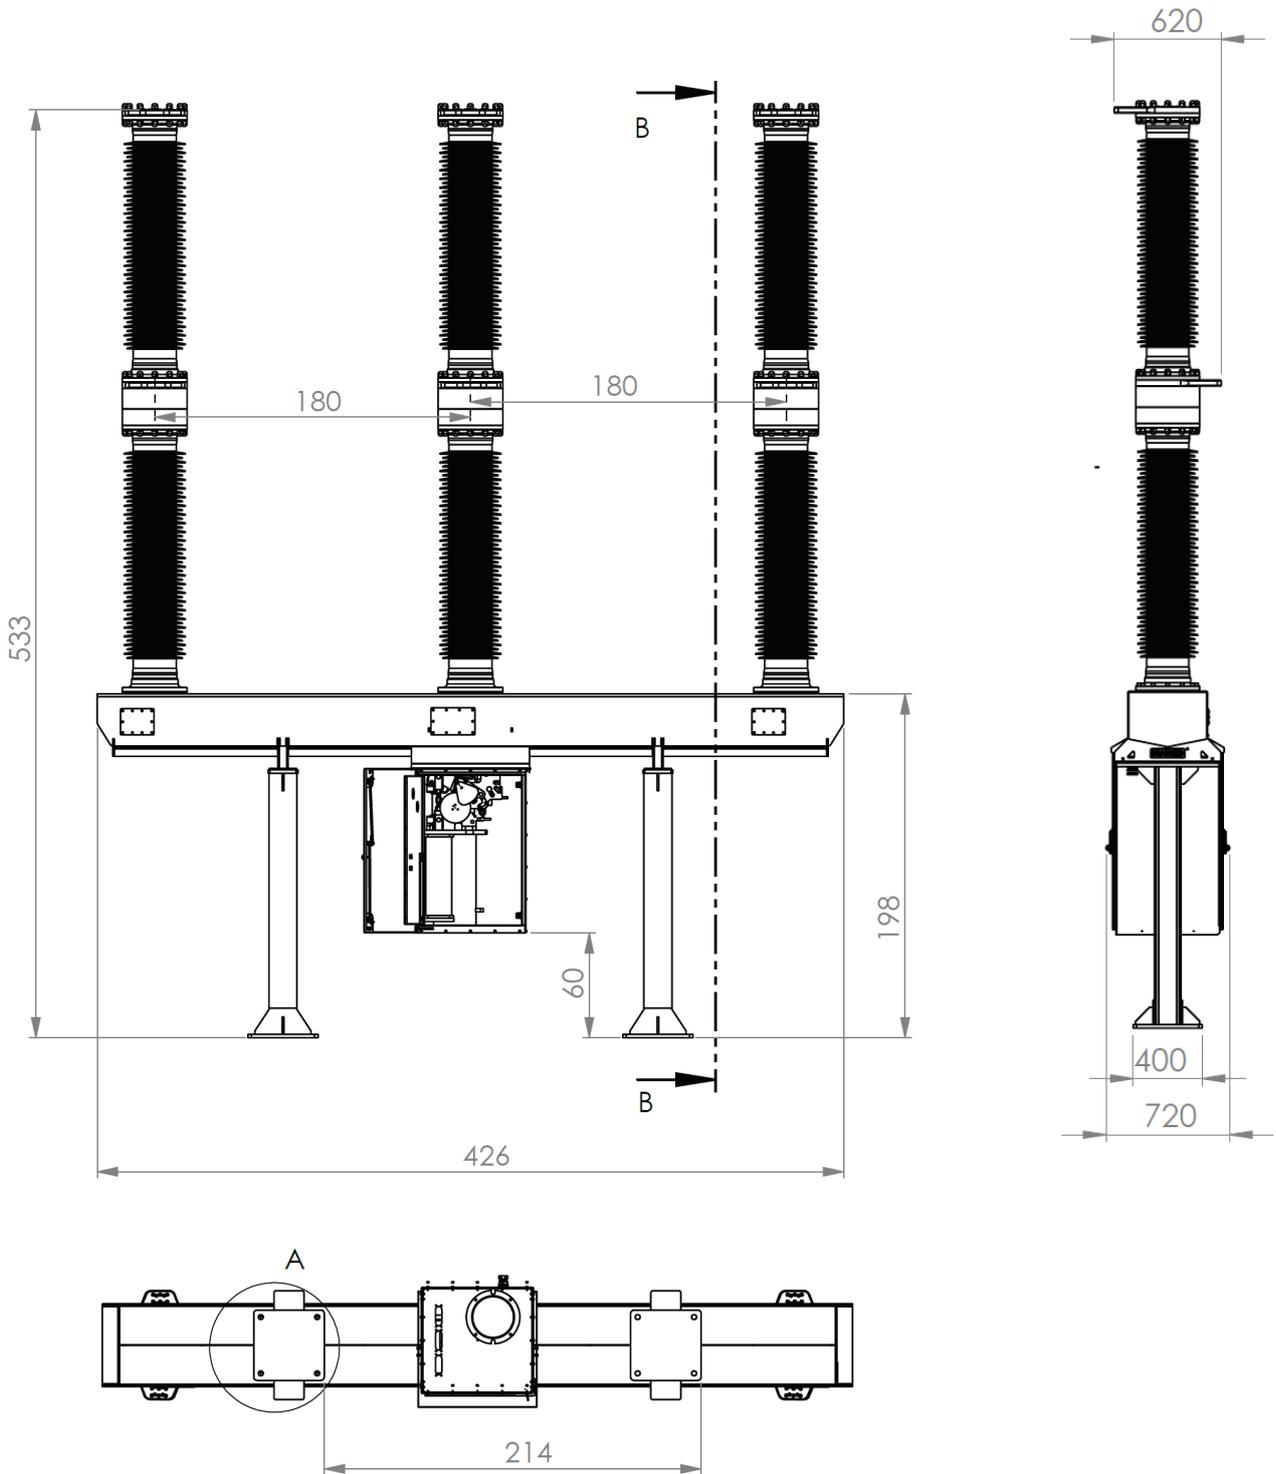

DRAWN EW 2024-03-05	UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: TOLERANCES: ISO 2768-1 LINEAR: m ANGULAR: K	DEBUR AND BREAK SHARP EDGES	Date: 2024-03-05	<b>HUGHES</b>
			Revision: R01B	
CHECKED			Title: OVX 1103 Installation drawing	
APPROVED			Part No:	
APPR. PROC.	A3 SCALE:1:40	FINISH:	DWG NO. OVX-1103-0000	
	DO NOT SCALE DRAWING	MATERIAL:	WEIGHT:	SHEET 1 OF 1



Hughes Power System is a Swedish manufacturer of environmentally friendly equipment for electrification and automation of mass transport and electrical distribution systems. Very high quality standards together with innovative approach result in an advanced range of products, aiming to improve network quality by minimizing the number and duration of faults.

The majority of Hughes Power System's products are designed and built in Sweden.

[www.hughespowersystem.com](http://www.hughespowersystem.com)

